Technical Data Sheet

Customer:	Part designation:	Customer part no.:
Kaschke Göttingen	**SP-E 16/5**	**SKNY255-5-4**

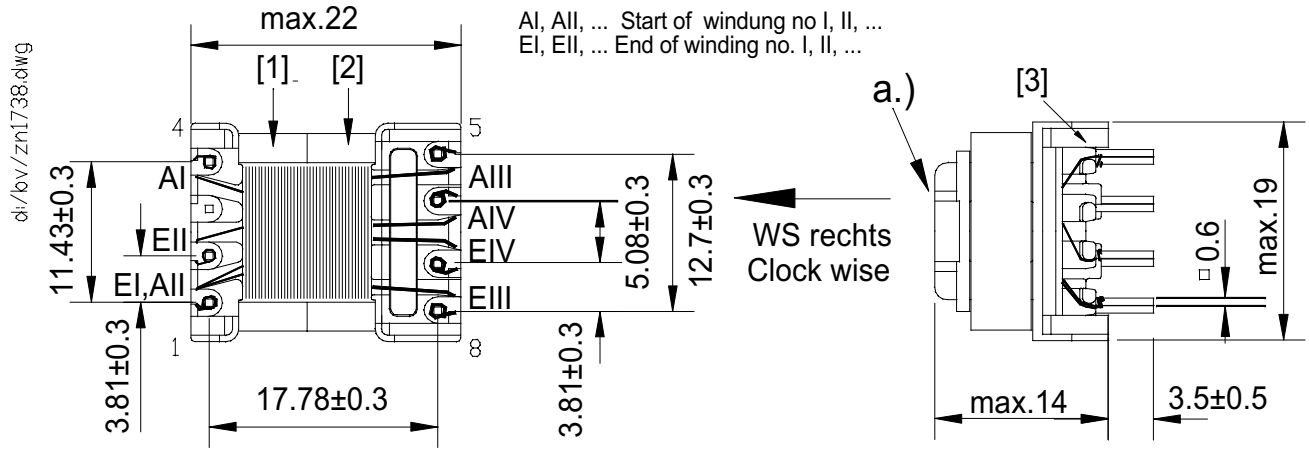

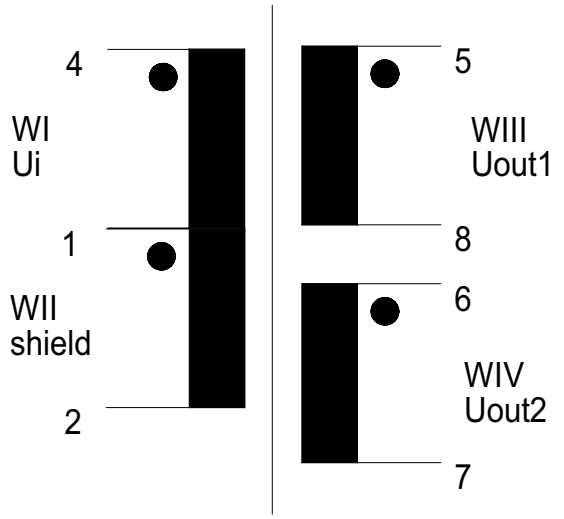

Core / material / air gap / AL	**E 16/5 K2006 or equiv**	
Nominal inductance	**LI = 1,55mH ± 15%**	
maximum transmissible power	**6 W**	
Working frequency	**44 - 132 kHz**	
Transformation ratio	**17,66:10:1:1**	
dielctric strength (50Hz/2s)	**4 kVeff/50Hz/1sec.**	
Nominal Current		
Design in comp. with standard	**EN60950/EN61558**	
Working / storage temperature	**-25°C- +85°C**	**-25°C- +115°C**
Miscellaneous	**F (DIN 40040)**	
	Ting 266-uni	

Remarks : **a.) marking**

Measuring device of L: **W&K 4225** | Measuring conditions of L: **50mV/10kHz/22,5°C**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person:	Date:	Design regulation no:	Index:
Uwe Dickhut	**. .**	**063.931**	**00**

PLEASE GIVE US YOUR WRITTEN RELEASE Date: _____ Signature: _____