
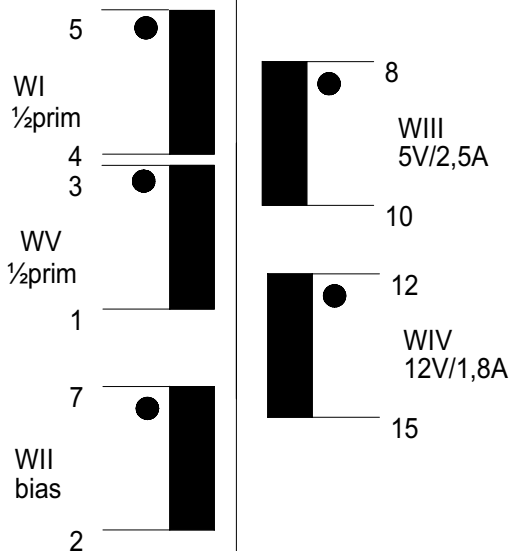


# Technical Data Sheet

Customer:  
**Kaschke Göttingen**

Part designation:  
**SP-EF 25**

Customer part no.:  
**SKOP245-5-12-35**

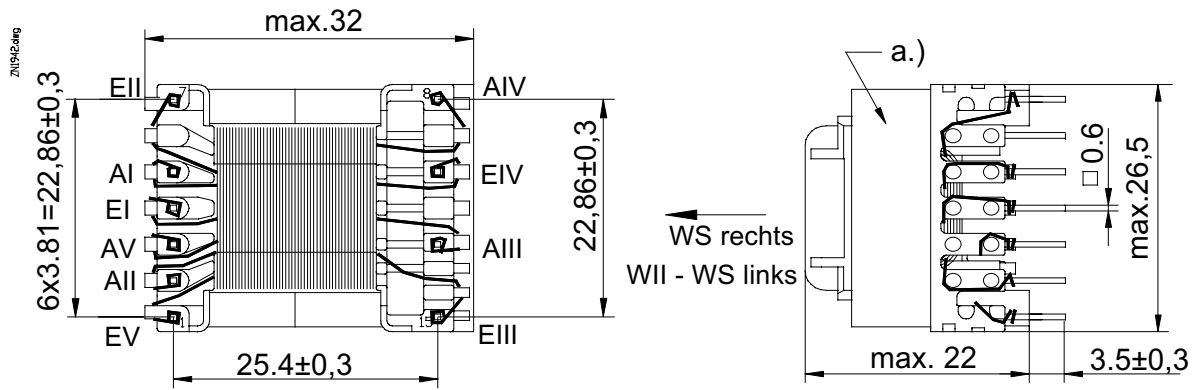

Core / material / air gap / AL	<b>E25/7 K2006 or equiv.</b>	
Nominal inductance	<b>LI+LV = 504 µH ±10%</b>	
maximum transmissible power	<b>34W</b>	
Working frequency	<b>132 kHz</b>	
Transformation ratio	<b>1:0,21:;09:0,21:1</b>	
dielectric strength (50Hz/2s)	<b>Prim-Sec = 3,75KV</b>	
Nominal Current		
Design in comp. with standard	<b>EN 61558</b>	
Working / storage temperature	<b>-25°C- 120°C</b>	<b>-25°C- 85°C</b>
Miscellaneous	<b>DIN 40040</b>	

Remarks : **a.) marking**

Measuring device of L: **W&K 3245**

Measuring conditions of L: **50 mV/10 KHz**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person:  
**Uwe Dickhut**

Date:  
..

Design regulation no:  
**095.954**

Index:  
**b**

**PLEASE GIVE US YOUR WRITTEN RELEASE**

\_\_\_\_\_

Date

\_\_\_\_\_

Signature